


Client : Park Place Energy – Akçakoca Production Platform

Project Description

- ⇒ Project : Flare Boom Removing
- ⇒ Location : Offshore – Akçakoca
- ⇒ Duration : 7 days onboard & 80 Man-days & 960 Manhours
- ⇒ Team : 1 x Project Supervisor
5 x Structural / Fitter / Welders
2 x Painter, 2 x Scaffolder 1 x NDT Technician

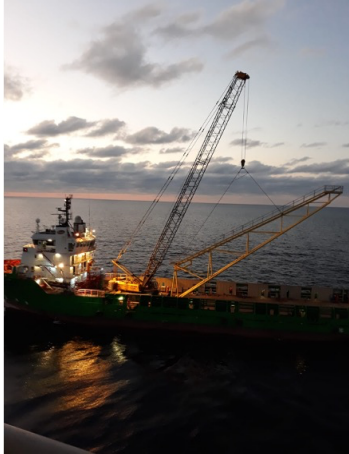

Scope of Work

- ⇒ Removing of Vent Boom for positioning Uranus Jack-Up
- ⇒ Cutting of Vent Bomm from deck fixed point
- ⇒ Lifting vent boom to floatable PSV to keep it
- ⇒ PSV Cargo Hold Preparation from installing of Vent Boom
- ⇒ Manufacturing of supporting parts as per client standarts
- ⇒ Require equipment, consumables, material, labor, logistic, scaffolding
- ⇒ Full NDT Tests

Service Providing Applicable Rules, Codes, Standarts

- ⇒ Full class EN 9606-1 L045H –111 certified teams with proper PQR and WPS
- ⇒ Manufacturing and providing all require material, certifications and inspection certifications & reports.

For more info please contact with degem@degem.com.tr