




DEGEM SHIP REPAIR
AND MAINTENANCE

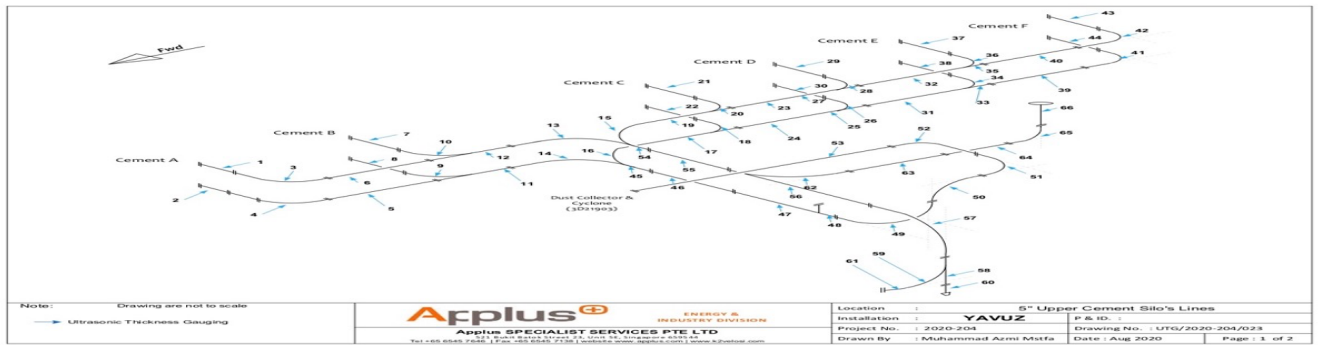

Client : Aroona Drilling – D/S YAVUZ

Project Description

- ⇒ Project : Replacement of Cement Bulk Lines
- ⇒ Location : Taşucu Port – Türkiye
- ⇒ Duration : 16 days onboard & 128 Man-days & 1536 Manhours
- ⇒ Team : 1 x Project Supervisor
6 x Piper / Fitter / Welders
1 x Painter, 1 x NDT Technician



REDMI NOTE 8
AI QUAD CAMERA



REDMI NOTE 8
AI QUAD CAMERA

Scope of Work

- ⇒ Replacement for loses thickness cement bulk lines
- ⇒ Taken bending measurement from existing line
- ⇒ Fabrication of new bended pipes
- ⇒ Providing Viatic Clamps
- ⇒ Require equipment, consumables, material, labor, logistic, scaffolding
- ⇒ Full NDT Tests
- ⇒ Pressure and Leakage Test

Service Providing Applicable Rules, Codes, Standarts

- ⇒ Full class EN 9606-1 L045H –111 certified teams with proper PQR and WPS
- ⇒ Manufacturing and providing all require material, certifications and inspection certifications & reports.
- ⇒ DNV-TL Accepting Rules and delivering all require documentation to DNV-TL surveyor for accepting.



REDMI NOTE 8
AI QUAD CAMERA

For more info please contact with degem@degem.com.tr

Evllya Çelebi Mah. Nazan Sok. B Blok No:7 Dr:2 34944 Tuzla/İstanbul/TURKEY
T: +902163928478 & F: +902164945185
M: degem@degem.com.tr W: www.degem.com.tr

